




**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

PCT / IB 0 3 / 0 5 3 2 3

21 NOV 2003

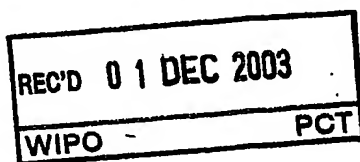

Bescheinigung

Certificate

Attestation


Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02080216.1

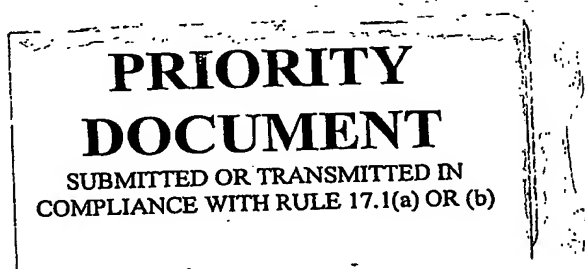

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02080216.1
Demande no:

Anmeldetag:
Date of filing: 10.12.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Activity monitoring

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G01P15/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

Activity monitoring

The present invention relates to activity monitoring, and in particular, but not exclusively to, activity monitoring of a human being.

5 The physical activity of a human being is an important determinant of its health. The amount of daily physical activity is considered to be a central factor in the etiology, prevention and treatment of various diseases. Information about personal physical activity can assist the individual in maintaining or improving his or her functional health status and quality of life.

10 A known system for monitoring human activity is described in the article "A Triaxial Accelerometer and Portable Data Processing Unit for the Assessment of Daily Physical Activity", by Bouten et al., IEEE Transactions on Biomedical Engineering, Vol. 44, N0.3, March 1997.

15 According to the known system a triaxial accelerometer composed of three orthogonally mounted uniaxial piezoresistive accelerometers is used to measure accelerations covering the amplitude and frequency ranges of human body acceleration. An individual wears the triaxial accelerometer over a certain period of time. A data processing unit is attached to the triaxial accelerometer and programmed to determine the time integrals of the moduli of accelerometer output from the three orthogonal measurement directions. These
20 time integrals are summed up and the output is stored in a memory that can be read out by a computer. The output of the triaxial accelerometer bears some relation to energy expenditure due to physical activity and provides as such a measure for the latter.

 The known system allows for measurement of human body acceleration in three directions. Using state of the art techniques in the field of integrated circuit technology
25 the accelerometer can be built small and lightweight allowing it to be worn for several days or even longer without imposing a burden to the individual wearing it.

 The known systems continuously sample and monitor information from the three accelerometers using three sample analog channels. Since the measurement is carried out continuously, the power consumption of such a device is undesirably high, and so it is

desirable to reduce power consumption, which should enable cheaper and/or smaller batteries to be usable.

It is therefore desirable to provide an activity monitor that can overcome these disadvantages.

5

According to one aspect of the present invention, there is provided an activity monitor comprising a measurement unit including a plurality of motion sensors, operable to produce respective sensor signals indicative of motion experienced thereby and a processor
10 for receiving the sensor signals from the measurement unit and operable to process the signals in accordance with a predetermined method, characterised in that the measurement unit has a single output channel and is operable to output the sensor signals in turn on the output channel.

15

Fig. 1 shows a block diagram schematically showing the components of a system embodying one aspect of the present invention;

Fig. 2 schematically shows the orthogonal outputs of three accelerometers;

Fig. 3 shows a flow diagram of the steps of a method embodying another
20 aspect of the present invention; and

Fig. 4 illustrates monitoring of sensor signals in embodiments of the present invention.

25

Figure 1 illustrates an activity monitor 1 embodying one aspect of the present invention. The activity monitor 1 comprises a measurement unit 11, a processor 12, and a memory unit 13. The measurement unit 11 is operable to produce data signals indicative of the motion of the activity monitor 1, and to supply those data signals to the processor 12. The processor 12 is operable to process the data signals output from the measurement unit, and is
30 able to store the data signals, or the results of the processing in the memory unit 13. Data can be transferred between the processor and the memory unit 13. The processor 12 is also able to be connected to an external host system 2, which can be a personal computer (PC) or other appropriate systems. The external host system 2 can be used to perform additional processing of the data held in the activity monitor 1.

In use, the activity monitor 1 is attached to the object to be monitored. For purposes of illustration in the following it is assumed that the object is a human individual, although it is clearly possible to apply such an activity monitor for any object. The activity monitor is attached to the individual or object for a certain time period.

5 The measurement unit comprises three accelerometers which are arranged in mutually orthogonal directions. The accelerometers output data signals which are indicative of the respective accelerations experienced by the accelerometers. The three accelerometers are arranged orthogonal to one another in a conventional manner.

10 On an individual, these directions are formed "antero-posterior", "medio-lateral" and "vertical", that are denoted as x, y and z, respectively. The accelerometers comprise strips of piezo-electric material that is uni-axial and serial bimorph. The strips are fixed at one end thereof.

15 The piezo-electric accelerometers act as damped mass-spring systems, wherein the piezo-electric strips act as spring and damper. Movements of the strips due to movement of the individual generate an electric charge leading to a measurement of a data signal. In case of human movements the frequency of the data signals lies in the range of 0.1- 20 Hz. The amplitude of the data signals lies between -12 g and +12 g. These numbers are discussed in more detail in the article mentioned earlier. Suitable piezo-electric materials to measure such data signals are known to a person skilled in the art.

20 In accordance with the present invention, the measurement unit has a single output channel, preferably a single analog output channel, which is supplied to the processor 12. The measurement unit operates to output one of the accelerometer signals at any one time via the output channel. The accelerometer signals are output in turn to the output channel via the measurement unit.

25 In one preferred embodiment of the present invention, the processor is operable to sample the output channel measurement unit in discontinuous fashion. In such a case, the processor samples the output channel from the measurement unit for a predetermined amount of time, and then stops sampling the measurement unit.

30 In addition to the processor unit operating discontinuously, or as an alternative to that methodology, the measurement unit can operate the output channel discontinuously during the output of each accelerometer signal. Figure 3 is a flow diagram illustrating the cycled outputs of the measurement unit. As will be appreciated from Figure 3, each of the outputs a_x , a_y and a_z are output in turn from the measurement unit. This is further illustrated in

Figure 4. For the sake of clarity, no particular output signal is shown in Figure 4, but the time periods during which the respective accelerometer signals are output are shown.

5 It will be appreciated that reducing the number of channels required from the output of the measurement unit to the processor, can reduce the cost of the activity monitor overall. In addition, varying the sampling rate of the processor means that there are periods of time in which the processor is not active, and so battery power can be conserved during these times. Embodiments of the invention, therefore, can reduce the cost and/or battery power consumption of an activity monitor.

10 It will be readily appreciated that the accelerometers are merely preferred motion sensors, and that any appropriate motion sensor could be used in an embodiment of the present invention and achieve the advantages of the present invention.

15 It is emphasised that the term "comprises" or "comprising" is used in this specification to specify the presence of stated features, integers, steps or components, but does not preclude the addition of one or more further features, integers, steps or components, or groups thereof.

CLAIMS:


1. An activity monitor comprising:
 a measurement unit including a plurality of motion sensors, operable to
produce respective sensor signals indicative of motion experienced thereby; and
 a processor for receiving the sensor signals from the measurement unit and
5 operable to process the signals in accordance with a predetermined method,
 characterised in that the measurement unit has a single output channel and is
operable to output the sensor signals in turn on the output channel.
2. An activity monitor as claimed in claim 1, wherein the motion sensors are
10 accelerometers.
3. An activity monitor as claimed in claim 1 or 2, wherein the motion sensors are
arranged to be mutually orthogonal.
- 15 4. An activity as claimed in claim 2 or 3, wherein the processor is operable to
sample the output channel of the measurement unit discontinuously in time.
5. An activity monitor as claimed in any one of claims 1 to 4, wherein the
measurement unit is operable to operate the output channel discontinuously in time during
20 output of each motion sensor output signal.
6. A method of monitoring activity using a plurality of motion sensors which are
operable to produce respective sensor signals indicative of motion experienced thereby, the
method comprising receiving sensor signals and processing the signals in accordance with a
25 predetermined method, characterized in that the sensor signals are monitored in turn via a
single channel.
7. A method as claimed in claim 6, wherein the output of the single channel is
monitored discontinuously in time.

8. A method as claimed in claim 6, wherein the sensor signals are produced discontinuously in time.

ABSTRACT:

An activity monitor is provided that can be cheaper and require lower power than existing activity monitors. A single output channel from a plurality of motion sensors is provided and monitored intermittently.

5 Fig. 1



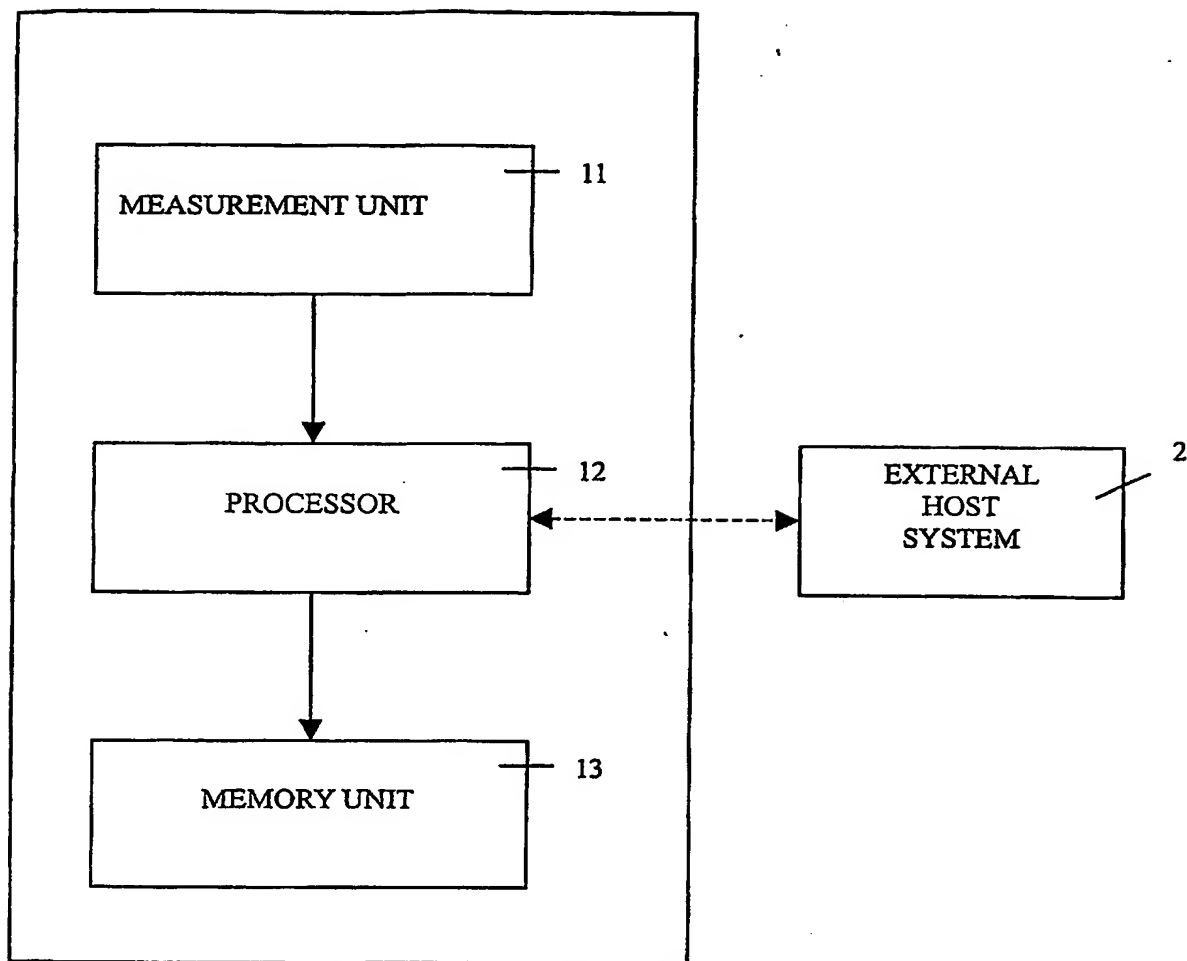


FIG.1

2/3

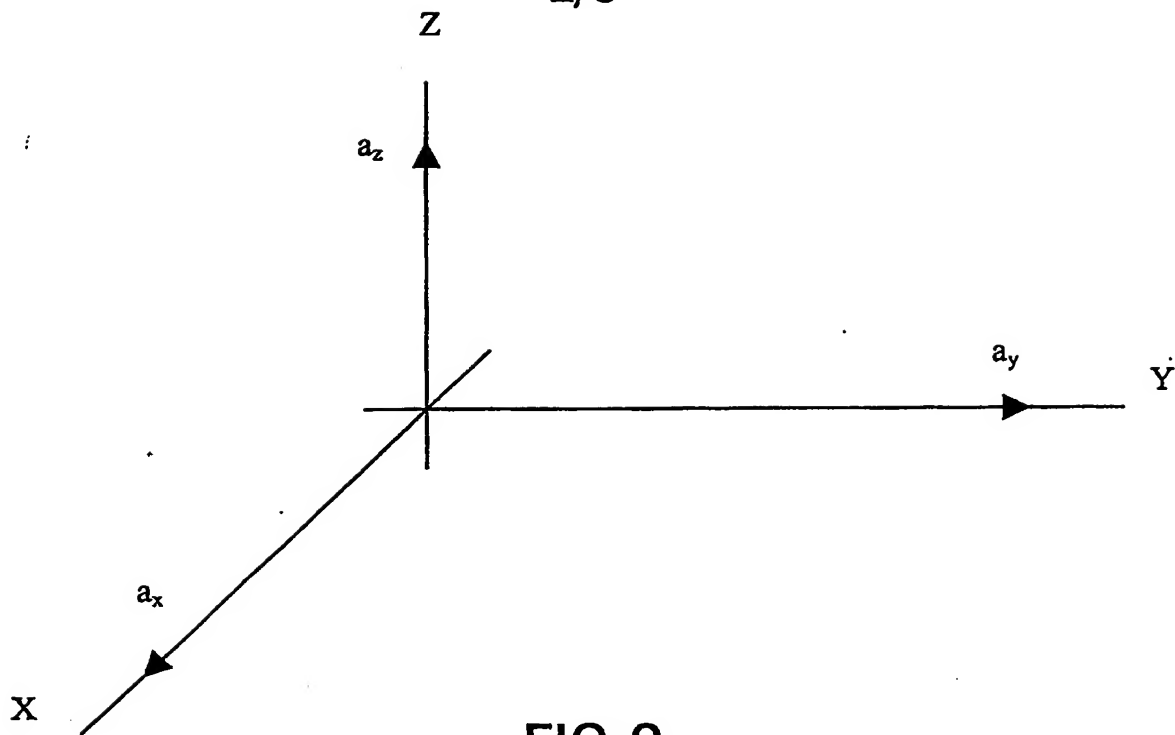


FIG.2

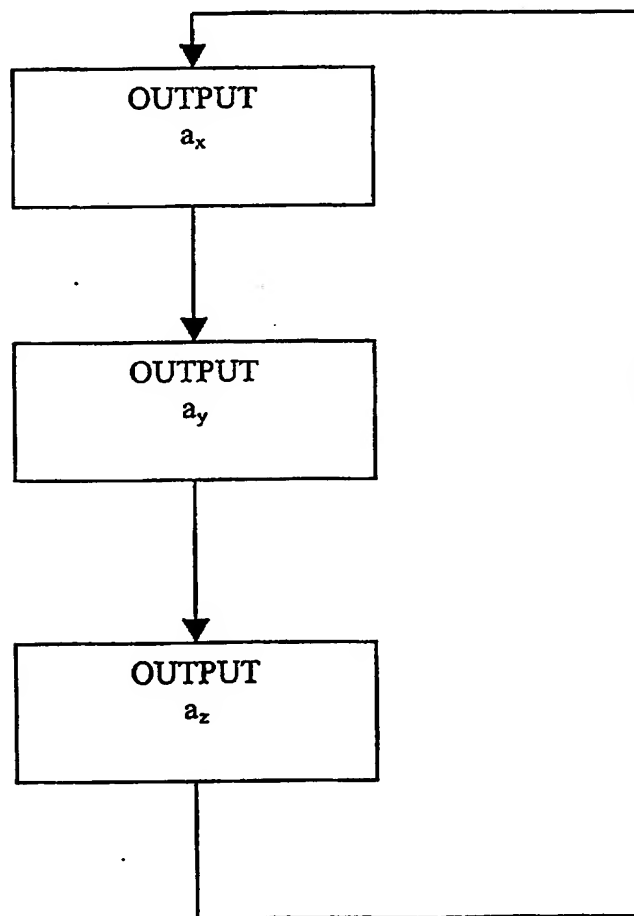


FIG.3

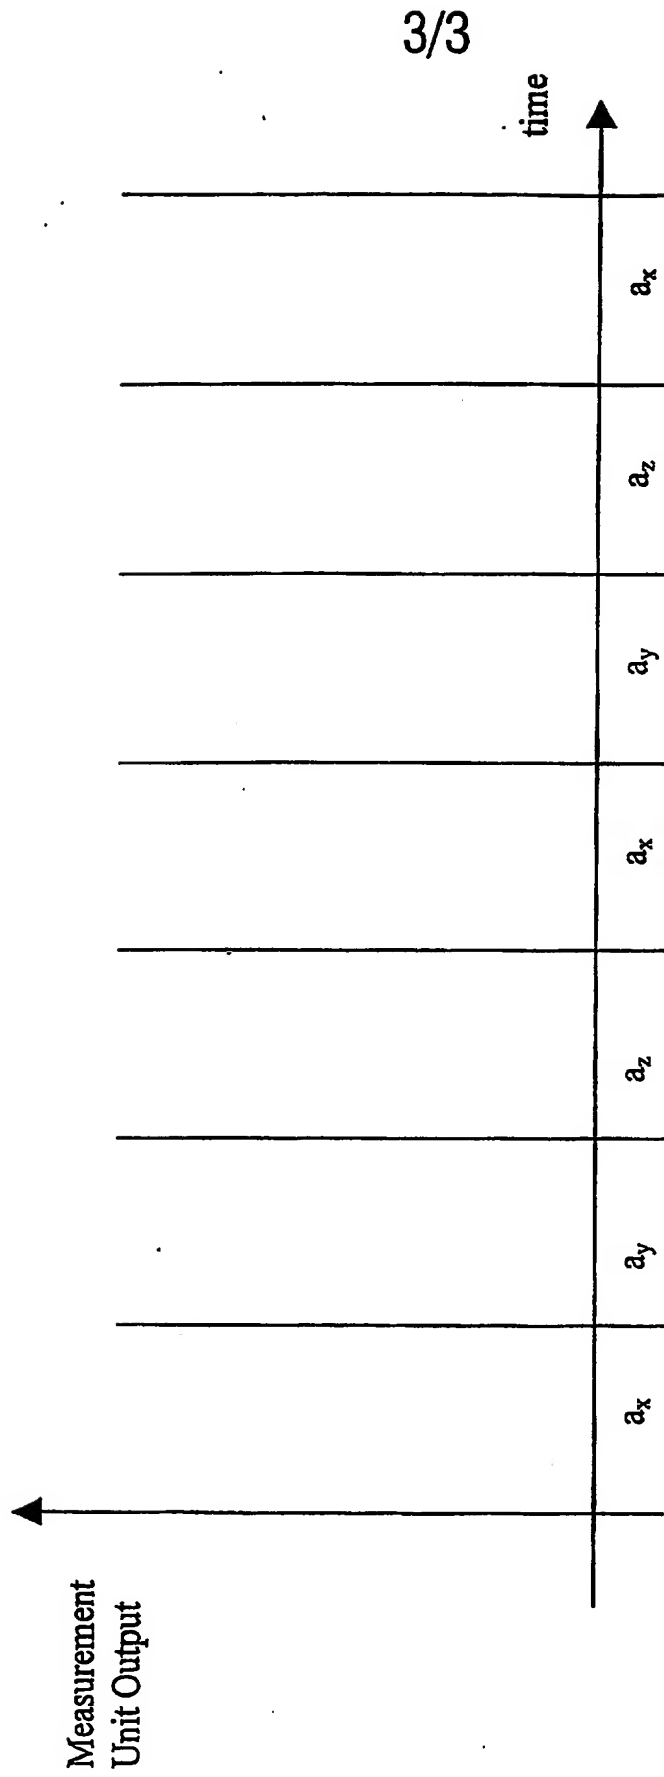


FIG.4

PCT Application

IB0305323

